











NorthStar heavy duty batteries excel at providing superior vibration resistance, high cranking amps and high reserve capacity. No other battery does more.


• Pure lead AGM technology delivers exceptional CCA ratings and reserve capacity cycling ability

• Proudly made in the USA at our state-of-the-art battery plant



NSB-AGM31

Technical Specifications

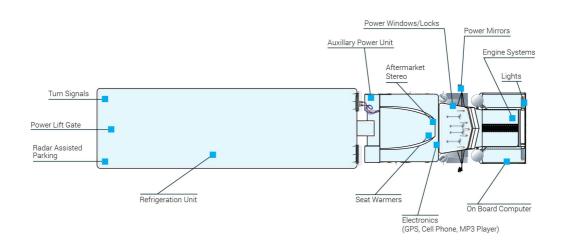

Technical data

Terminal configuration	Threaded
Terminal illustration	+ -
Pulse cranking amps	2150 A
CCA rating at -18°C (0°F)	1150 A
CA/MCA rating at 0°C (32°F)	1370 A
Reserve capacity	220 min
Capacity - 20 hour rate (1.75 vpc)	103 Ah
Internal resistance	2.2 m Ω @ 25°C (77°F)
Short circuit current	5000 A
Warranty	4 years full
Quantity per layer	15
Quantity per pallet	30

Enersys World Headquarters 2 Approvide ลระออก-hazardous cargo for ground, sea, and air 1 Beach PA 19605 (USAUS DOT Regulation 49 and ICAO & IATA F

806. Please see our SDS for complete details at www.enersys.com

- •Complies with Telcordia® SR-4228, Network Equipment Building System (NEBS™) Criteria Levels
- •The management systems governing the manufacture of this product are ISO 9001 and ISO 14001 certified

Technical Drawing

