




NorthStar heavy duty batteries excel at providing superior vibration resistance, high cranking amps and high reserve capacity. No other battery does more.

- Pure lead AGM technology delivers exceptional CCA ratings and reserve capacity cycling ability
- Proudly made in the USA at our state-of-the-art battery plant

NSB-AGM31


Technical Specifications

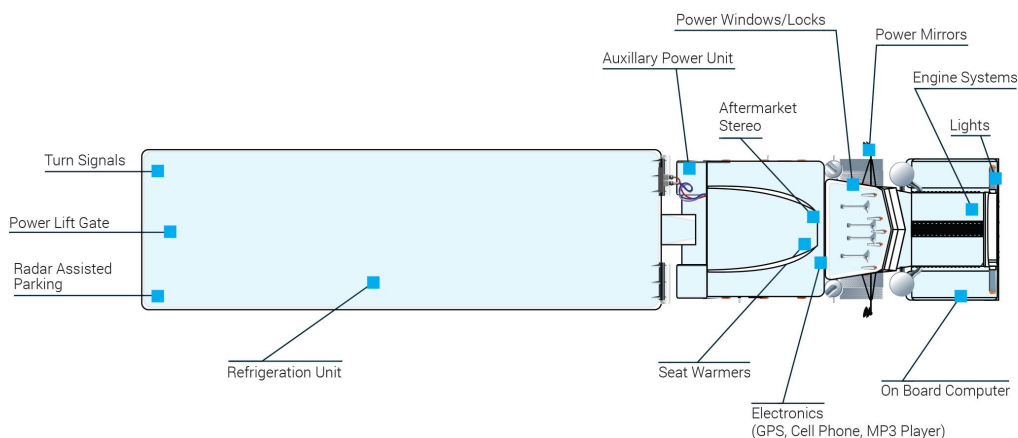

Technical data

Terminal configuration	Threaded
Terminal illustration	
Pulse cranking amps	2150 A
CCA rating at -18°C (0°F)	1150 A
CA/MCA rating at 0°C (32°F)	1370 A
Reserve capacity	220 min
Capacity - 20 hour rate (1.75 vpc)	103 Ah
Internal resistance	2.2 mΩ @ 25°C (77°F)
Short circuit current	5000 A
Warranty	4 years full
Quantity per layer	15
Quantity per pallet	30

Technical Drawing

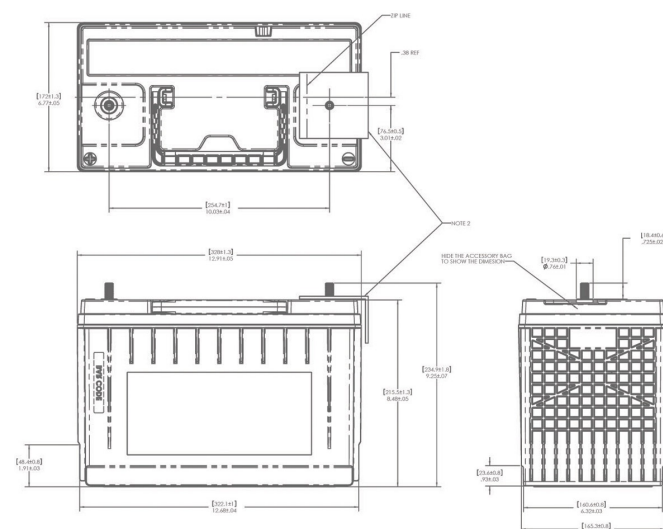

QUALITY ASSURED
ISO 9001



EnerSys World Headquarters
2500 PA 19505, USA
Tel: +1-610-208-1991/+1-800-538-3627
Approved as non-hazardous cargo for ground, sea, and air transport in accordance with US DOT Regulation 49 and ICAO & IATA F 806. Please see our SDS for complete details at www.enersys.com

•Complies with Telcordia® SR-4228, Network Equipment Building System (NEBS™) Criteria Levels

•The management systems governing the manufacture of this product are ISO 9001 and ISO 14001 certified