











NorthStar automotive batteries excel at providing both high reserve capacity and cranking amps, perfect for performance and start-stop technology applications.


• Pure lead AGM technology delivers exceptional CCA ratings and reserve capacity cycling ability

• Proudly made in the USA at our state-of-the-art battery plant



NSB-AGM24F

Technical Specifications

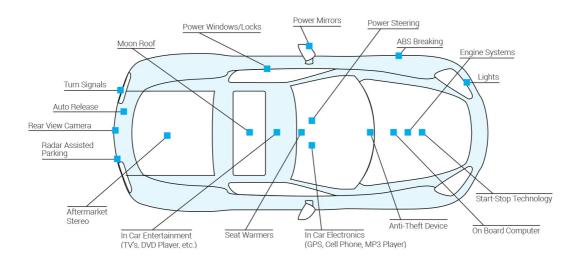

Technical data

Terminal configuration	SAE
Terminal illustration	- +
Pulse cranking amps	1500 A
CCA rating at -18°C (0°F)	840 A
CA/MCA rating at 0°C (32°F)	1000 A
Reserve capacity	160 min
Capacity - 20 hour rate (1.75 vpc)	76 Ah
Internal resistance	3 m Ω @ 25°C (77°F)
Short circuit current	3100 A
Warranty	4 years full
Quantity per layer	20
Quantity per pallet	40

EnerSys World Headquarters
2Approved asadon-hazardous cargo for ground, sea, and air 1 Reading PA 19605 USA PGC Regulation 49 and ICAO & IATA F

806. Please see our SDS for complete details at www.enersys.com

- •Complies with Telcordia® SR-4228, Network Equipment Building System (NEBS™) Criteria Levels
- •The management systems governing the manufacture of this product are ISO 9001 and ISO 14001 certified

Technical Drawing

