

NSB-AGM27M






NorthStar marine batteries excel at providing high vibration resistance, with the high cranking amps and reserve capacity that watercraft demand.

- Pure lead AGM technology delivers exceptional CCA ratings and reserve capacity cycling ability
- Proudly made in the USA at our state-of-the-art battery plant



northstarbattery.com

NSB-AGM27M Technical Specifications

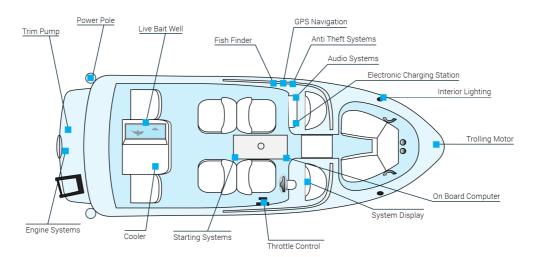

Technical data

Terminal configuration	Marine/SAE
Terminal illustration	::
Pulse cranking amps	1750 A
CCA rating at -18°C (0°F)	930 A
CA/MCA rating at 0°C (32°F)	1080 A
Reserve capacity	195 min
Capacity - 20 hour rate (1.75 vpc)	92 Ah
Internal resistance	2.6 m Ω @ 25°C (77°F)
Short circuit current	5000 A
Warranty	3 years full
Quantity per layer	15
Quantity per pallet	30

EnerSys World Headquarters 2Approvoid Asaton-hazardous cargo for ground, sea, and air 1 Reading PA 19605 USA accordance with +US DOT Regulation 49 and ICAO & IATA F

806. Please see our SDS for complete details at www.enersys.com

•Complies with Telcordia® SR-4228, Network Equipment Building System (NEBS™) Criteria Levels

•The management systems governing the manufacture of this product are ISO 9001 and ISO 14001 certified

Technical Drawing

