




NorthStar marine batteries excel at providing high vibration resistance, with the high cranking amps and reserve capacity that watercraft demand.

- Pure lead AGM technology delivers exceptional CCA ratings and reserve capacity cycling ability
- Proudly made in the USA at our state-of-the-art battery plant

NSB-AGM24M


Technical Specifications

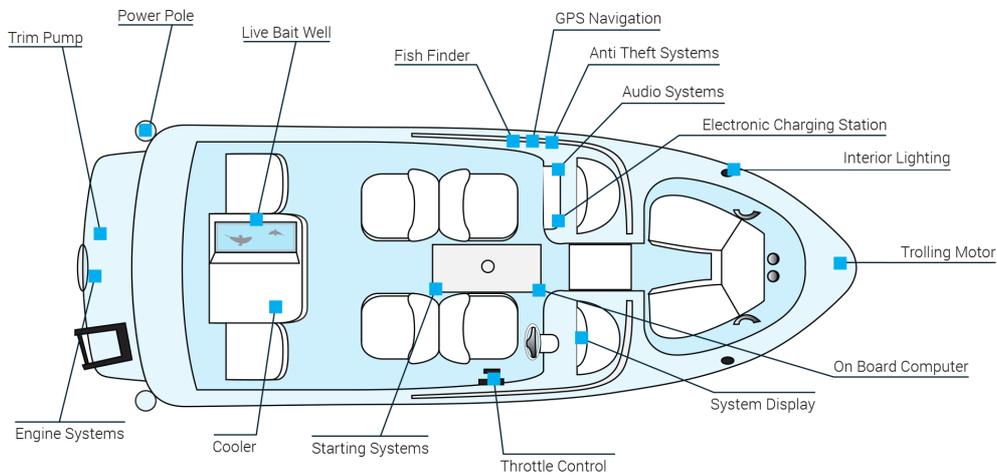

Technical data

| | |
|------------------------------------|--------------------|
| Terminal configuration | Marine/SAE |
| Terminal illustration | |
| Pulse cranking amps | 1500 A |
| CCA rating at -18°C (0°F) | 840 A |
| CA/MCA rating at 0°C (32°F) | 1000 A |
| Reserve capacity | 160 min |
| Capacity - 20 hour rate (1.75 vpc) | 76 Ah |
| Internal resistance | 3 mΩ @ 25°C (77°F) |
| Short circuit current | 3100 A |
| Warranty | 3 years full |
| Quantity per layer | 20 |
| Quantity per pallet | 40 |

Technical Drawing

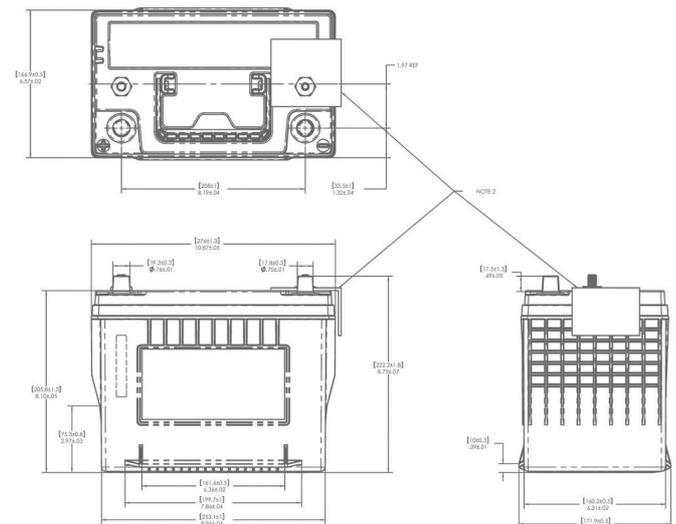

EnerSys World Headquarters
 Approved as non-hazardous cargo for ground, sea, and air transport in accordance with US DOT Regulation 49 and ICAO & IATA F 806. Please see our SDS for complete details at www.enersys.com

- Complies with Telcordia® SR-4228, Network Equipment Building System (NEBS™) Criteria Levels
- The management systems governing the manufacture of this product are ISO 9001 and ISO 14001 certified

QUALITY ASSURED
ISO 9001

