




NorthStar automotive batteries excel at providing both high reserve capacity and cranking amps, perfect for performance and start-stop technology applications.

- Pure lead AGM technology delivers exceptional CCA ratings and reserve capacity cycling ability
- Proudly made in the USA at our state-of-the-art battery plant

# NSB-AGM65


## Technical Specifications

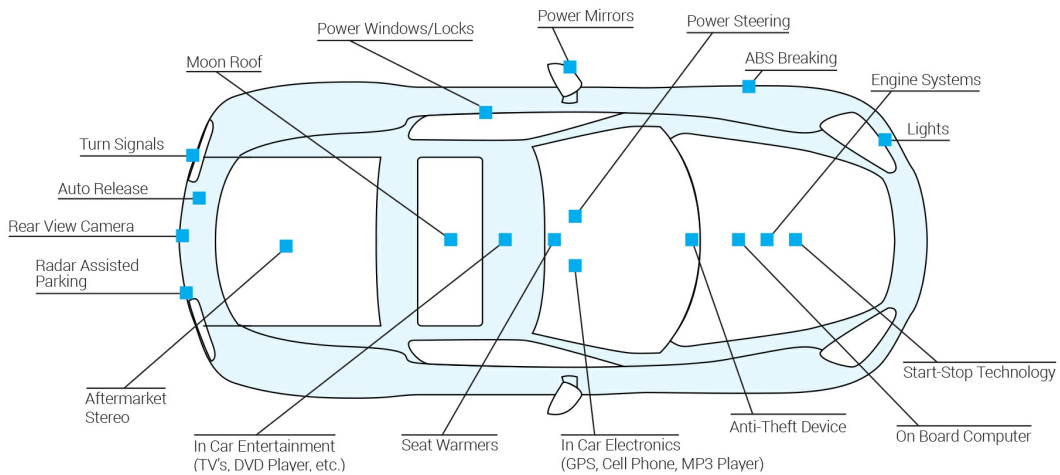

### Technical data

Terminal configuration	SAE
Terminal illustration	
Pulse cranking amps	1750 A
CCA rating at -18°C (0°F)	930 A
CA/MCA rating at 0°C (32°F)	1070 A
Reserve capacity	135 min
Capacity - 20 hour rate (1.75 vpc)	69 Ah
Internal resistance	3.3 mΩ @ 25°C (77°F)
Short circuit current	5000 A
Warranty	4 years full
Quantity per layer	20
Quantity per pallet	40

### Technical Drawing

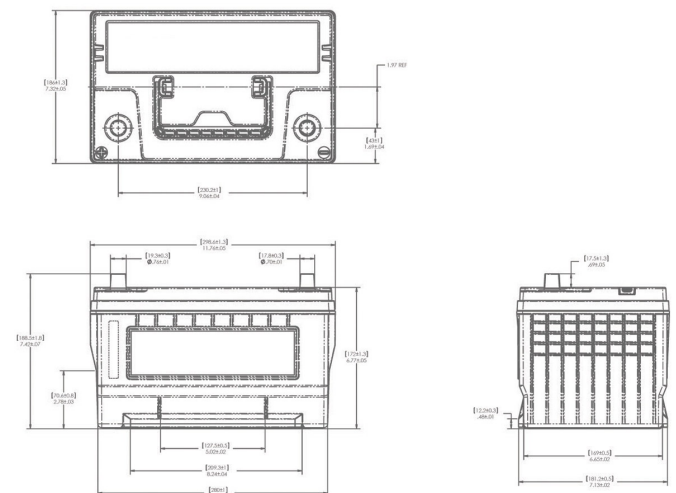

EnerSys World Headquarters  
 2000 PA 19505 USA  
 Bechtel Rd, PA 19505 USA  
 Tel: +1-610-208-1991/+1-800-538-3627  
 806. Please see our SDS for complete details at [www.enersys.com](http://www.enersys.com)

- Complies with Telcordia® SR-4228, Network Equipment Building System (NEBS™) Criteria Levels
- The management systems governing the manufacture of this product are ISO 9001 and ISO 14001 certified

QUALITY ASSURED  
**ISO 9001**

